



INSTALLATION INSTRUCTIONS FOR

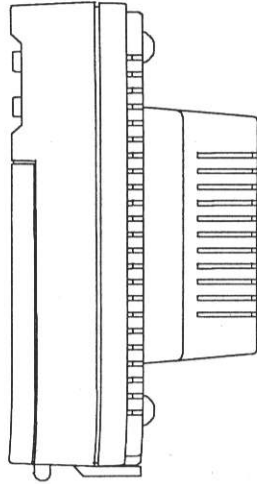

ELV1

Programmable Line Voltage Thermostat

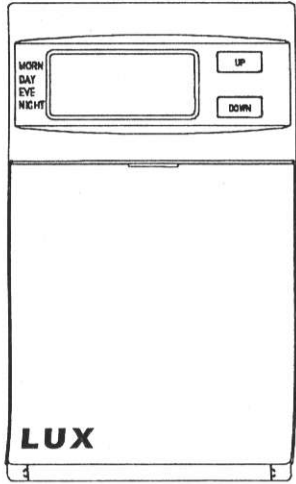

For Use On:

- Heating Only 120/240 Vac Single Pole Applications
- Baseboard, Ceiling Cable and other Radiant Heat

Not For Use On:

- Double Pole Applications
- Heating/Cooling or Cooling Only
- Low Voltage (24Vac) Systems

Electrical Rating

16A at 120/240 Vac
1900W at 120Vac
(Non-Inductive)
3800W at 240 Vac
(Non-Inductive)

Temperature Differential

- $\pm 1^\circ\text{F}$ Factory Preset; Adjustable

Batteries

- Requires 2 AA Batteries - not incl.

Programming

- Preprogrammed - 4 Periods per day
- 5 / 2 Programming
- Weekdays/Weekends can be different
- $^\circ\text{F} / ^\circ\text{C}$ Changeable
- Temporary Temperature Override
- Vacation Hold

Dimensions

- 4.7" T x 2.7" W x 2.4" D
- 1.4" D from wall surface

Wall Plate

- 4.8" W x 5.0" H Wallplate Included



- CAUTION**
- Disconnect power supply before making wire connections to prevent electrical shock or equipment damage.
 - All wiring must comply with applicable codes and ordinances.
 - Thermostats are designed to be used with appliances having a limit control.
 - Maximum load for this thermostat MUST NOT EXCEED 3800W, otherwise a potential fire hazard exists.

Location:

Install a vertical switch box for mounting the ELV1 approximately 1.5 m (5 ft.) above the floor on an inside wall where the thermostat will be exposed to average room temperature. The thermostat must be placed away from concealed warm or cold water pipes, air ducts, or drafts from hallways, fireplaces or stairways to sense temperature properly. Do not place the thermostat above the heater.

WIRING

1. Disconnect power while installing. Double check that the thermostat is rated for the voltage and amperage load to be controlled.
2. Remove the cover by carefully pressing the button at the bottom of the thermostat and swinging the body up and away.
3. When replacing an old line voltage wall thermostat, remove it carefully to avoid damage to the insulation on the wiring. Check the old insulation for cracks, nicks, or fraying and apply certified electrical tape where necessary to achieve adequate insulation, or replace the wires in an approved fashion.
4. Attach the wires with solderless wire connectors (provided). Be sure that all wire connectors are tight.



CAUTION: Do not short the 120 / 240 Vac wires with the thermostat. This will damage the thermostat and void the warranty.

WARNING: To avoid the risk of fire hazard, all connections to aluminum conductors must be made using approved CO/ALR solderless wire connectors. Do not use the supplied solderless wire connectors.

5. Bend the solid conductors, then push them and the wire connectors into the electrical box. Secure the thermostat base to the electrical box with the mounting screws.
6. Snap the cover in place.
7. Turn the power on.

INSTALLING BATTERIES

The ELV1 requires batteries to operate your furnace and retain its programming in memory and to light the display. Replace the batteries when the LO BAT indicator appears in the display or at least once a year.

NOTE: When replacing batteries, you have approximately 1 minute before the programs are lost.

1. Remove the fresh batteries from their package.
2. Open the front door of the thermostat and tilt out the battery compartment.
3. Remove the used batteries if necessary.
4. Install TWO new "AA" size alkaline batteries in the battery compartment. Observe the polarity marking shown in the compartment.
5. Place the battery compartment back in the thermostat.
6. Close the door.

INSTALLATION

WARNING

- This Thermostat is a line voltage (120 / 240 Vac) control. Do not install it unless you are completely familiar with house wiring. If improperly handled, there can be a risk of electric shock hazard which may cause serious injury or death.
- The ELV1 is rated for normal full load current on a dual residential 20A circuit breaker or fuse block. Do not use on circuits protected by higher-rated over-current protection devices. Some sustained fault conditions can cause product failure.
- Do NOT connect to voltage different from the device rating.

WARNING: Use Energizer® or DURACELL® Alkaline Batteries ONLY for all Lux thermostats requiring batteries.

Note: If this is the first time you are installing batteries, the thermostat will display "SUN 12:00 AM". Within 90 seconds, the thermostat will begin to display the room temperature alternately with the time. To correct the display, see SETTING THE TIME AND DAY.

OPERATION

This thermostat is "armchair programmable." You can make any program or setting changes with the thermostat body off or on the wall thermostat base.

The ELV1 alternately displays the current time and the room temperature. It also displays the day of the week and the currently active control program that is controlling the temperature: MORN, DAY, EVE, or NIGHT. The set point temperature will appear in the right side of the display.

The Built-In Programs

Push in the RESET key. This sets the built-in heating programs. To review the built-in programs, rotate the dial to SET WEEKDAY PROGRAM or SET WEEKEND PROGRAM.

You can use the built-in programs as shown, or change them as you wish. Each day is divided into four periods. Each period has its own starting time and temperature.

	PERIOD	HEAT
WEEKDAYS preprograms	MORN	6:00 AM 70°
	DAY	8:30 AM 60°
	EVE	3:00 PM 70°
	NIGHT	11:00 PM 65°
WEEKENDS preprograms	MORN	6:00 AM 70°
	DAY	6:15 AM 70°
	EVE	3:00 PM 70°
	NIGHT	11:00 PM 65°

The dial must be in the RUN position to close the door.

Programming the ELV1

You can change any of the preset times and/or temperatures to suit your schedules for the weekday and weekend programs. Each day is divided into four periods: Morning, Day, Evening, and Night.

A blank programming chart is provided below for you to record your temperature settings in that chart.



Rotate dial to SET WEEKDAY PROGRAM. To program the WEEKEND, rotate the dial to SET WEEKEND PROGRAM. With dial on set WEEKDAY Program, you will see this display.

UP	DOWN	To change the start time for MORN.	UP	DOWN	To change the start time for EVE.
NEXT		To program temperature.	NEXT		To program temperature.
UP	DOWN	To change the temp. setting for MORN.	UP	DOWN	To change the temp. setting for EVE.
NEXT		To move to DAY.	NEXT		To move to NIGHT.
UP	DOWN	To change start time for DAY.	UP	DOWN	To change the start time for NIGHT.
NEXT		To program temperature.	NEXT		To program temperature.
UP	DOWN	To change the temp. setting for DAY.	UP	DOWN	To change the temp. setting for NIGHT.
NEXT		To move to EVE.			

Rotate dial to RUN position to start the programs.

Setting the TIME and DAY



C A U T I O N
The ELV1 is protected against normal static electric discharges. However, in extremely dry weather you should touch another metal object before the ELV1 to avoid potential loss of programs.

Open the drop down door on the front of the thermostat. Rotate the dial to the SET DAY/TIME position. You should see the display pictured above with a flag pointing to a day of the week flashing. When you are finished setting the day and time, rotate the dial to RUN to return to normal operation or to another position to continue programming.

UP	NEXT	To set current time. The time (e.g. "12:00 AM") will be flashing.	UP	DOWN	To change the current time.
----	------	---	----	------	-----------------------------

TEMPERATURE OVERRIDE AND TEMPERATURE HOLD

These features let you change the current Set Temperature without changing the programs stored in your thermostat's memory.

Temporary Temperature Override



- Press UP/DOWN to change the current temperature setting. The OVERRIDE indicator appears on display.
- The Override feature will be automatically canceled at the start of the next program period.
- To cancel OVERRIDE prior to next program period press UP/DOWN until original set temperature appears. OVERRIDE indicator will disappear from display.

VACATION Temperature HOLD



- Press HOLD. Adjust temperature as desired with UP/DOWN.
- Temperature setting will not change even after next program period begins.
- To clear, press HOLD again.

ADVANCED FEATURES

TEMPERATURE SWING

A thermostat works by turning your heating on and off whenever the room temperature varies a certain number of degrees from the set-point temperature. This variation is the "swing."

Your system should cycle on about 3 to 6 times per hour. A smaller swing number increases the number of cycles, so room temperature is more constant. A larger swing number decreases the number of cycles, to save energy in most cases.

SWING SETTINGS



Dial must be in the run position

HOLD	NEXT	Press together
UP	DOWN	To change swing
NEXT		Press to set.

CHANGING FROM °F to °C AND A 12HR CLOCK TO A 24HR CLOCK

- Warning: Making these changes will require you to reset the thermostat. Copy any of your customized programs onto the chart below. This will be your reference to reenter the programs afterward.
- Located at the center of the circuit board of your thermostat are two dip switches.
- To change to Celsius, move the top dip switch to the right.
- To change to a 24HR clock, move the bottom dip switch to the right.
- Press the reset key on the front of the thermostat for the changes to take effect.
- Reprogram as necessary.

PROGRAMMING CHART

DAY	PERIOD	TIME	TEMP
MONDAY through FRIDAY	MORN		
	DAY		
	EVE		
	NIGHT		
SATURDAY and SUNDAY	MORN		
	DAY		
	EVE		
	NIGHT		

TECHNICAL SERVICE

If you have problems installing this thermostat, please reread the instructions carefully. Be sure the batteries are good, and installed correctly. Press the RESET button if erratic operation is encountered. If you still have problems, call Technical Service at 1-856-234-8803 between 8:00 a.m. and 4:30 p.m. Eastern Standard Time, Monday through Friday. Please refer to Model ELV1.

WARRANTY

Limited Warranty: If this unit fails because of defects in materials or workmanship within one year of date of original purchase, LUX will, at its option, repair or replace it. This warranty does not cover damage by accident, misuse, or failure to follow installation instructions. Implied warranties are limited in duration to one year from date of original purchase. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Please return malfunctioning or defective units to the participating retailer from which purchase was made, along with proof of purchase. Please refer to Technical Service Section before returning thermostat.

Purchaser assumes all risks and liability for incidental and consequential damage resulting from installation and use of this unit. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. Applicable in the U.S.A. only.
